

3rd PLATE Conference

September 18–20, 2019 Berlin, Germany

Nils F. Nissen Melanie Jaeger-Erben (eds.)

Franconi, Alessio; Badalucco, Laura; Peck, David; Nasr, Nabil: A multi-hierarchical "Design for X" framework for accelerating circular economy. In: Nissen, Nils F.; Jaeger-Erben, Melanie (Eds.): PLATE – Product Lifetimes And The Environment: Proceedings, 3rd PLATE CONFERENCE, BERLIN, GERMANY, 18–20 September 2019. Berlin: Universitätsverlag der TU Berlin, 2021. pp. 257–265. ISBN 978-3-7983-3125-9 (online). https://doi.org/10.14279/depositonce-9253.

This article – except for quotes, figures and where otherwise noted – is licensed under a CC BY 4.0 License (Creative Commons Attribution 4.0). https://creativecommons.org/licenses/by/4.0/.

Universitätsverlag der TU Berlin



3rd PLATE 2019 Conference Berlin, Germany, 18-20 September 2019



A Multi-hierarchical "Design for X" Framework for Accelerating Circular Economy

Franconi, Alessio^(a); Badalucco, Laura^(a); Peck, David^(b); Nasr, Nabil^(c)

- a) University luav of Venice, Venice, Italy
- b) Delft University of Technology, Delft, The Netherlands
- c) Rochester Institute of Technology, Rochester, United States of America

Keywords: Design for X; Collaborative Design; Interdisciplinary Approach; Circular Framework; Design Tool.

Abstract: In the past, many frameworks have been conceived in order to support companies and their designers to develop sustainable products. In the circular economy, however, these frameworks no longer appear to be sufficient, due to the difficulty in identifying multiple design strategies for the different product life cycles across time dimensions. By adopting a Design for X (DfX) approach, this paper develops a multi-hierarchical DfX framework that allows designers to incorporate different strategies to better address product life cycles. This framework could facilitate the further development of a more comprehensive and interdisciplinary DfX tool. A key part of the method deployed is an interview guide approach, where five experts from across academia and industry, were interviewed. This qualitative research draws on their diverse expertise and generates an intersectoral link between different fields. Moreover, the DfX tool can be used to highlight relationships between different circular economy strategies, by providing insights into how interdisciplinary design decisions influence each other. Such an approach could allow designers to effectively visualize a bigger picture and positively influence the application and acceleration of the circular economy.

Introduction

Circular product design is a complex and interdisciplinary process. At the early design stages, a variety of designers must make decisions not only about the first lifespan of the product, but also forecasting where, when, for whom and how the product will be reintegrated in the following life cycles, as well as mitigate concomitant objectives in business. engineering, product and service design. Indeed, in contrast to today's linear economy, circular economy (CE) presupposes a constant resourcing cycle aimed at preserving natural assets, maximizing the use of natural capital and decreasing human impacts on nature (McDonough, et al., 2010; Stahel, 2010; Bakker, et al., 2014). This new vision implies a substantial change not only on the product design, but in the entire organizational system of our society. Hence, it is de facto unlikely that an optimal transition will occur if there is an imbalance between disciplines and the system could not be considered as a holistic, complex structure, to be designed and managed (Murray, et al., 2017).

The collaboration between so many fields has

always been fundamental to respond to the exponential complexity of systemic thinking for sustainability. Some frameworks, such as Ecodesign Strategy Wheel (Brezet, H., & Van Hemel, C. 1998), Product-system lifecycle (Vezzoli, et al., 2008), Whole System Design (Charnley, 2010) are well known to take in consideration the bigger picture for sustainable and interdisciplinary decision-making. However, these frameworks tend to neglect the different design approaches for the different life cycles of the product, which are essential factors to consider in designing for the CE. For this reason, it is necessary to review these existing frameworks on which the design is often based today and reframe a new and up-to-date framework that also tackles multiple loops.

The first challenge to develop a comprehensive framework among so many variables is to determine a common terminology (Sauvé et al. 2016). Many researchers, published works, conferences and tools make use of the Design for X (DfX) approach to make designers aware about the implications of their design decisions on later life cycle phases of a product. In these



A multi-hierarchical "Design for X" framework for accelerating CE

activities, 'X' is used as a variable which represents a specific design strategy. Huang (1996), defined DfX as an "imperative practice product development to simultaneous improvements in products and processes". Many DfX approaches have also been addressed in the present CE literature (Bakker et al., 2014; Go, et al., 2015; Van Weelden, et al., 2016, De los Rios, et al., 2017 and Moreno, et al., 2017). Therefore, the DfX can arguably be used to map a circular approach, to a sequence of detailed interdisciplinary strategies, acting as a flexible pattern to be applied according to the circular design requirements.

In this paper, through the theoretical application of DfXs, the authors present a framework by which it is possible to hierarchy circular strategies that cover the life cycle of products across temporal dimensions. Furthermore, this paper introduces how the framework could be used for the future development of an interactive and open-sourced design tool.

Methodology

To build robust bases capable of supporting the complexity, information volume, overlapping concepts and the wide scope of design disciplines, a methodology has been structured, in line with Friedman (2003) that comprises of four steps outlined below.

Friedman states that theoretical construction cannot be based on practice. Indeed, it is questionable how critical and systematic thinking can be established based on case studies. that meet specific contextual. productive and temporal requirements. Practice can, however, provide a validation of the questions that were created via theory (Friedman, 2003). Theory can be based on a general structure that can be revised, reformulated and reorganized, according to very precise logic, allowing one to develop a resilient theoretical framework (Webster, et al., 2002).

The research shown in this paper therefore used this theoretical framework consisting of four steps: (1) Discover - an exploratory review of the literature, after which a (2) Define - concept map was defined and developed (3) Develop - three initial hypothesis and finally (4) Validate - the hypothesis was validated through 5 guided interviews (Fig. 1). There are iteration loops from step 4 back to steps 1, 2 and 3. The structure deployed forms part of a larger ongoing PhD research activity and

requires further steps in order to develop the final PhD work.




Figure 1. Methodological steps.

Discover - Exploratory Literature Review

To understand and define the main DfX strategies and try to create continuity between them in the various phases of the design process, it was decided to undertake a first research on the most common design practices with respect to the circular economy according to Webster, et al., (2002). The tool used for this research was Google Scholar, the keywords used in multiple combinations were "Design Theory", "Design Disciplines", "Circular Product Design", "Circular Economy", "Design Process", "Systemic Design ","Design for X", and "Design for Collaboration". All the terms were first searched individually and then combined using AND as a conjunction between the different keywords. Along with the material found through the review of the literature, some texts reputed fundamental were added (such as Brezet, et al., 1998, Vezzoli et al., 2008; Stahel, 2010 and Nasr, et al., 2018). All literature generated was considered.

Define - Concept Map

To group and view the findings of the exploratory literature review, the concept map methodology was used. This methodology allows the interdependencies of the different concepts to be connected through logical reasoning (Novak, et al., 2008). Because the goal of the research was to define an interdisciplinary framework, the concept map developed around the word "Design for Subsequently, Collaboration". importance to all the design phases, the word "Design for Collaboration" was connected with every single phase of the life cycle of the closed-cycle product readapted based on the frameworks of Brezet, et al. (1997), and Vezzoli, et al. (2008).

This step helped to connect the main influences of different design disciplines with each phase of the product life cycle. For some of the phases of the life process of the product a DfX was assigned in order to establish the possible disciplines which are able to deal with this

Franconi A., Badalucco L., Peck D., Nasr N.A multi-hierarchical "Design for X" framework for accelerating CE

design phase. The map presented in Fig. 2 does not intend to be a map that includes all the strategies identified, but only an analysis of key aspects.




Figure 2. Concept map.

From Fig. 2, a series of observations can be made.

- Some DfXs can be applied by different disciplines / designers simultaneously (Kuo, et al., 2001)
- Some DfXs are applicable exclusively in specific disciplines / designers
- Some DfXs are the consequence of hierarchical decisions (Huang, 1996)
- Some DfXs are mutually non-exclusive
- Some DfXs are mutually exclusive
- Some DfXs are complementar (Van Weelden, et al., 2016; De los Rios, et al., 2017; Moreno, et al., 2017)
- Some DfXs are applicable across time dimensions
- Some DfXs follow different processes in different contexts and times
- Some DfXs are applicable in single and different phases
- Some DfXs can be applied consequently
- Some DfXs can be applied in parallel
- Some DfXs can take effect after the first loop of the product
- Some DfXs may progressively increase or decrease in effectiveness in different loops
- Several DfXs have variable effectiveness on different products

The synthetic DfXs list of observations highlight the complexity of the hierarchization. Consequently, it was hypothesized that a hierarchy of DfXs should follow a multi-hierarchical approach. While a detailed verification of the entire conceptualization presented in Fig. 2 goes beyond the scope of this study, this has been useful to formulate three hypotheses which are the interpretation that resulted from it.

Develop - Hypothesis

Three distinct hierarchies for DfX are conceivable. The first hypothesis relates to the hierarchy of the priority orders of the 'X' strategies. For example, with a view to implement a design strategy for refurbishing (X^1) it is essential, in sequential order, work on design for disassembly (X^2) and then more in detail on design for maintenance (X^3), etc. (Van den Berg, et al., 2015), respectively X^1 , X^2 , X^3 . 'X' may vary in detail in the applied design strategy. The X^1 determines the main circular strategy or in other words Maintenance, Reuse, Redistribute, Refurbish, Remanufacture, and Recycle, whereas X^2 , X^3 the possible design strategies to reach X^1 . Hence, the first hypothesis is:

H1

To achieve the first degree DfX (X^1) a hyperbolic tree hierarchy diagram, that describes each sub DfX strategy, can be used (Fig. 3).




Figure 3. DfX hierarchization based on degrees of priority and design specifications.

Companies organize product development based on the phases of product lifecycle. The choices made during each phase (P) of the process can influence the subsequent phases (Cataldo et al., 2006). In order to achieve X¹, a variety of designers, in different design phases, should coordinate their own DfXs effectively



A multi-hierarchical "Design for X" framework for accelerating CE

using specific X^2 and X^3 . Hence, the second hypothesis is:

H2

Through a circular life cycle phase diagram, it is possible to position any DfX for each phase (Fig. 4).




Figure 4. DfX hierarchization based on the phases of the product life cycle.

CE aims at recovering products for many loops by using as less energy and materials as possible for each loop (Bakker et al. 2014). In business terms, the life cycle of the product should last for many loops (L) by using specific combinations of strategies in order to make the business last longer. With that aim, designers should foresee which X^1 should be applied for each product lifetime (L^1 , L^2 , L^3 , etc.) in order to then decide in a hierarchical configuration X^2 and X^3 . Hence, the third hypothesis is:

НЗ

In a spiral loop diagram, DfXs can be applied over multiple product life cycles (Fig. 5).




Figure 5. DfX hierarchization based on the different loops / temporal dimensions.

Validate - Interview guide

In the last step of the methodology, an interview with experts from the academic and industrial world through a guided face-to-face interview was undertaken. This methodology consists of asking all the interviewees the same questions, leaving them free to explore specific issues (Patton, 2002) to validate the proposal. A brief description of the profiles and skills of the interviewees has been provided in Tab. 1.

No.	Area of CE expertise	Sector	From
1	User experience and	Acade.	USA
	product design		
2	Transportation and	Acade.	USA
	mobility systems		
3	Consumer electronics,	Acade.	USA
	nanomaterials, and		
	lithium-ion batteries		
4	Policies supporting	Acade.	USA
-	energy technology,		
	energy systems and		
	information technology		
5	Product lifecycle	Indu.	USA
-	design and		
	remanufacturing		

Table 1. Specification on the competences and origin of the interviewees.



Franconi A., Badalucco L., Peck D., Nasr N. A multi-hierarchical "Design for X" framework for accelerating CE

Framework validation

Respondents informed were of the methodological process described above. First, the interviewees were asked whether they found the three hypotheses, Fig. 3, 4, and 5 interdependent and whether a simultaneous use of these hierarchies would have favored interdisciplinary decision-making multiple temporal dimension. Subsequently, the specific requirements of the hierarchization of the three dimensions and the potential of a possible tool on the basis of hierarchization were examined. The areas considered in this phase included the requirements related to the application of different strategies in terms of application, relations and management of the different DfXs by different designers. The interviews provided valuable information on the possible hierarchy of DfX, validating all the processes which led to formulate the final framework (Fig. 6). Some key comments can be summarized in two categories, multihierarchies and use of the future tool.

Multi-hierarchies' considerations:

- The choices made in L¹, P¹ influence all the remaining choices;
- The design process always begins with L¹, P¹ but may not proceed in sequential order;
- X¹ is the only objective of each phase
 (P) and each loop (L);
- X¹ varies with the variation of Ls;
- X¹ should be the only target, while X² and X³ may vary in both number and importance depending on the product;
- The common denominator from which to select the DfXs is the cost, to then refine the selection of subsequent strategies;
- X² represents the specific strategy for each phase;
- The hierarchy of contents should be standardized to the various disciplines and easily integrated within different companies;
- The choices of the DfXs is influenced also for each loop by external factors such as politics, technology, society, and culture;

Considerations for the future tool for the future tool:

- The tool must be able to simplify the vision but at the same time to maintain a scientific rigor;
- The tool should help to manage the overhead of designing alternatives by defining basic objectives to focus on;
- The tool should help the designer to establish the priorities of the different DfXs in a dynamic and intuitive way;
- To facilitate control by system designers, there must be a mechanism capable of showing quantifiable information flow for prioritizing different DfXs;
- Through case studies, it is possible to facilitate an immediate understanding of the strategy applied in reference;
- The hierarchy is not only direct but also indirect between the different disciplines, so the relationships between different DfXs should be emphasized jointly;
- Different companies could have variable departments and structures and not have complete control of the design process, the tool should be able to be used cross-companies;
- Companies may be able to tailor their approach to different needs;



A multi-hierarchical "Design for X" framework for accelerating CE

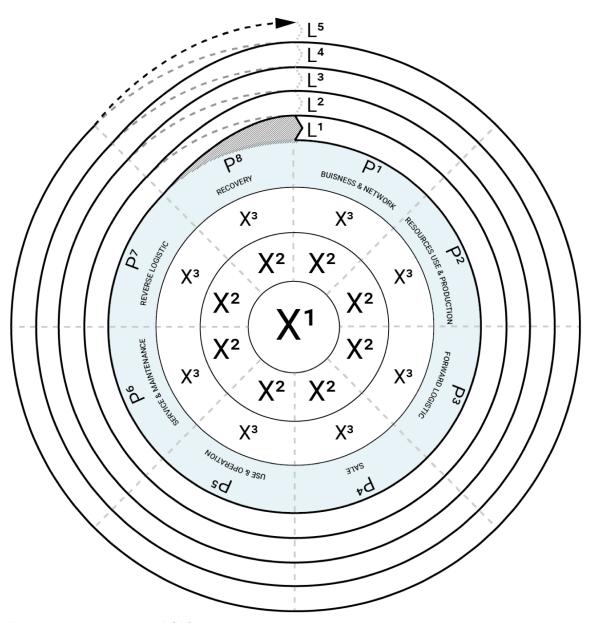


Figure 6. Multi-hierarchical DfX framework.

Circular Design Tool: future development and concluding remarks

In a circular context, the good organization of the different DfX strategies is the key to increase profitability across multiple loops. This paper presents a *Multi-hierarchical DfX Framework* that will shape the basis of an interdisciplinary tool. The tool will help designers to identify for each loop (L) a circular objective, defined here as a X¹ strategy, which might be maintenance, reuse, redistribute, refurbish, remanufacture, or recycle. All appropriate DfX strategies to pursue directly the

achievement of the X^1 can be considered X^2 strategies. The same principle applies to the X^3 , X^4 and so on. When designing for a new loop, the X^1 strategy may change. If so, X^2 and X^3 strategies may change accordingly. Different designers (e.g. business, engineers, product or service designers) should be able to set an appropriate combination of X^2 , X^3 in order to achieve X^1 .

Through this tool, designers will be able to dynamically compare and identify DfX strategies from the early stages of the design process. In order to make the management of the complexity easier, the tool can suggest correlated DfXs based on the X¹ identification for each loop (Fig. 7). This could help designers



A multi-hierarchical "Design for X" framework for accelerating CE

in coordinating relations between design strategies for three reasons; the first reason is to manage the interdependences between different strategies. For example, if the designer decides that X^1 in the L^1 is Design for Refurbishing, in L^2 P^4 a consequential logical X^2 is Design for Change Behavior and X³ could be for Consumer Acceptance Refurbished Product (Pazhani, et al., 2014; Van Weelden, et al., 2016). The second reason is to exclude the strategies that conflict one another. For example, if the designer decides that X¹ in the L¹ is Design for Recycling, in L² P⁵ the X² cannot be Design for Attachment and Trust. The third and last reason is to help monitoring and forecasting crucial DfX strategies. For example, if the designer decided that from L¹ to L⁴, X¹ is Design for Remanufacturing, the designer should define if X² in P⁸ is Design for Closed Loop Supply Chain Networks, or instead Design for Open Loop Supply Chain Networks (Ene, et al., 2014). These decisions completely change consequential strategies in the other loops.

This research is a step forward to the mastery of the circular design strategies. More research is needed to collect and map DfXs according to the multi-hierarchical framework presented in this paper. A first prototype of the tool was developed and made available at www.circulardesign.it.




Figure 7. Visualization of the initial decision-making process of X¹ related to each loop.

Acknowledgments

This work has been financially supported by the Simone Cesaretti Foundation, IT, with a Fulbright Scholarship (Alessio Franconi) at Rochester Institute of Technology, NY, USA. This would not be possible without the support of Dr. Laura Badalucco (luav of Venice), Dr. David Peck (TU Delft) and Dr. Nabil Nasr (RIT).

References

- Baxter, W., Aurisicchio, M., & Childs, P. (2017). Contaminated Interaction: Another Barrier to Circular Material Flows. Journal of Industrial Ecology, 21(3), 507–516.
- Bakker, C. A., Hollander, M. C. den, Hinte, E. van, & Zijlstra, Y. (2014). *Products That Last product design for circular business models* (First edition edition). Delft: TU Delft Library/Marcel den Hollander IDRC.
- Bakker, C., Wang, F., Huisman, J., & den Hollander, M. (2014). Products that go round: Exploring product life extension through design. Journal of Cleaner Production, 69(Supplement C), 10–16
- Bocken, N. M. P., Pauw, I. de, Bakker, C., & Grinten, B. van der. (2016). Product design and business model strategies for a circular economy. Journal of Industrial and Production Engineering, 33(5), 308–320.
- Boons, F., & Lüdeke-Freund, F. (2013). Business models for sustainable innovation: State-of-the-art and steps towards a research agenda. Journal of Cleaner Production, 45, 9–19.
- Brezet, H., & Van Hemel, C. (1998). Ecodesign: A Promising Approach to Sustainable Production and Consumption. The Hague: United Nations Pubns.
- Brown, P., Bocken, N., & Balkenende, R. (2019). Why Do Companies Pursue Collaborative Circular Oriented Innovation? Sustainability, 11(3), 635.
- Cataldo, M., Wagstrom, P. A., Herbsleb, J. D., & Carley, K. M. (2006). Identification of coordination requirements: Implications for the Design of collaboration and awareness tools. Proceedings of the 2006 20th Anniversary Conference on Computer Supported Cooperative Work CSCW '06, 353.
- Ceschin, F., & Gaziulusoy, I. (2016). Evolution of design for sustainability: From product design to design for system innovations and transitions. Design Studies, 47, 118–163.
- Chiang, W.-C., Mital, A., & Desai, A. (2009). A generic methodology based on Six-Sigma techniques for designing and manufacturing consumer products for functionality. International Journal of Product Development, 7(3/4), 349–371.
- Chiu, M. C., & Kremer, G. E. O. (2011). Investigation of the applicability of Design for X tools during design concept evolution: A literature review. International Journal of Product Development, 13(2), 132.
- De los Rios, I. C., & Charnley, F. J. S. (2017). Skills and capabilities for a sustainable and circular economy: The changing role of design. Journal of Cleaner Production, 160, 109–122.
- Elia, V., Gnoni, M. G., & Tornese, F. (2017). Measuring circular economy strategies through index methods: A critical analysis. Journal of Cleaner Production, 142, Part 4, 2741–2751.
- Ene, S., & Öztürk, N. (2014). Open Loop Reverse Supply Chain Network Design. Procedia - Social and Behavioral Sciences, 109, 1110–1115.



A multi-hierarchical "Design for X" framework for accelerating CE

- Friedman, K. (2003). Theory construction in design research: Criteria: approaches, and methods. Design Studies, 24(6), 507–522.
- Gaiardelli, P., Cavalieri, S., & Saccani, N. (2008). Exploring the relationship between after-sales service strategies and design for X methodologies. International Journal of Product Lifecycle Management, 3(4), 261.
- Go, T. F., Wahab, D. A., & Hishamuddin, H. (2015). Multiple generation life-cycles for product sustainability: The way forward. Journal of Cleaner Production, 95(Supplement C), 16–29.
- Hepperle, C., Biedermann, W., Böcker, A., & Lindemann, U. (2011). Design for X-Guidelines and Lifecycle Phases with Relevance for Product Planning a MDM-Based Approach. The Design Society.
- Hollander, M. C. den, Bakker, C. A., & Hultink, E. J. (2017). Product Design in a Circular Economy: Development of a Typology of Key Concepts and Terms. Journal of Industrial Ecology, 21(3), 517–525.
- Huang, G. Q. (A c. Di). (1996). Design for X: Concurrent engineering imperatives (1. ed). London: Chapman & Hall.
- Kuo, T.-C., Huang, S. H., & Zhang, H.-C. (2001). Design for manufacture and design for 'X': Concepts, applications, and perspectives. Computers & Industrial Engineering, 41(3), 241–260
- Lewandowski, M. (2016). Designing the Business Models for Circular Economy—Towards the Conceptual Framework. Sustainability, 8(1), 43.
- Lindemann, U. (2007). A Vision to Overcome "Chaotic" Design for X Processes in Early Phases. DS 42: Proceedings of ICED 2007, the 16th International Conference on Engineering Design, Paris, France, 28.-31.07.2007
- Lutters, E., van Houten, F. J. A. M., Bernard, A., Mermoz, E., & Schutte, C. S. L. (2014). Tools and techniques for product design. CIRP Annals Manufacturing Technology, 63(2), 607–630.
- Malinowski, L., & Nowak, T. (2007). Dfx Platform a Holistic Approach to Design Concepts Evaluation. DS 42: Proceedings of ICED 2007, the 16th International Conference on Engineering Design, Paris, France, 28.-31.07.2007
- Maussang, N., Zwolinski, P., & Brissaud, D. (2009). Product-service system design methodology: From the PSS architecture design to the products specifications. Journal of Engineering Design, 20(4), 349–366.
- McDonough, W., & Braungart, M. (2010). Cradle to Cradle: Remaking the Way We Make Things (1st edizione). North Point Press.
- Meerkamm, H. (1994). Design for X—A Core Area of Design Methodology. Journal of Engineering Design, 5(2), 165–181.
- Mendoza, J. M. F., Sharmina, M., Gallego-Schmid, A., Heyes, G., & Azapagic, A. (2017). Integrating Backcasting and Eco-Design for the Circular Economy: The BECE Framework. Journal of Industrial Ecology, 21(3), 526–544.

- Mont, O. (2008). Innovative approaches to optimising design and use of durable consumer goods. International Journal of Product Development, 6(3–4), 227–250.
- Moreno, M., De los Rios, C., Rowe, Z., & Charnley, F. (2016). A Conceptual Framework for Circular Design. Sustainability, 8(9), 937.
- Murray, A., Skene, K., & Haynes, K. (2017). The Circular Economy: An Interdisciplinary Exploration of the Concept and Application in a Global Context. Journal of Business Ethics, 140(3), 369–380.
- Nasr, N., Russell, J., Bringezu, S., Hellweg, S., Hilton, B., Kreiss, C., & con Gries, N. (2018). Redefining Value The Manufacturing Revolution (UN Environment).
- Novak, J. D., & Cañas, A. J. (2008). The Theory Underlying Concept Maps and How to Construct and Use Them | Better Evaluation.
- Ordoñez, I., & Rahe, U. (2013). Collaboration between design and waste management: Can it help close the material loop? Resources, Conservation and Recycling, 72, 108–117.
- Patton, M. Q. (2002). Qualitative Research & Evaluation Methods. SAGE.
- Pazhani, S., & Ravindran, A. R. (2014). Design of Closed Loop Supply Chain Networks. International Journal of Business Analytics (IJBAN), 1(1), 43–66.
- Piscicelli, L., & Ludden, G. (2016). The potential of Design for Behaviour Change to foster the transition to a circular economy. Proceedings of DRS 2016. Presentato al Design Research Society 50th Anniversary Conference, Brighton, UK.
- Prendeville, S., & Bocken, N. (2017). Design for Remanufacturing and Circular Business Models. In M. Matsumoto, K. Masui, S. Fukushige, & S. Kondoh (A c. Di), Sustainability Through Innovation in Product Life Cycle Design (pagg. 269–283).
- Rehman, F. U., & Yan, X.-T. (2005). A Prototype System to Support Conceptual Design Synthesis for Multi-X.
- Rossi, M., Germani, M., & Zamagni, A. (2016). Review of ecodesign methods and tools. Barriers and strategies for an effective implementation in industrial companies. Journal of Cleaner Production, 129, 361–373.
- Sauvé, S., Bernard, S., & Sloan, P. (2016). Environmental sciences, sustainable development and circular economy: Alternative concepts for trans-disciplinary research. Environmental Development, 17, 48–56.
- Simatupang, T. M., & Sridharan, R. (2008). Design for supply chain collaboration. Business Process Management Journal, 14(3), 401–418.
- Stahel, W. (2010). The Performance Economy. Palgrave Macmillan UK.
- Sumter, D., Bakker, C., Balkenende, R., Sumter, D., Bakker, C., & Balkenende, R. (2018). The Role of Product Design in Creating Circular Business Models: A Case Study on the Lease and Refurbishment of Baby Strollers. Sustainability, 10(7), 2415.



3rd PLATE Conference Berlin, Germany, 18-20 September 2019

Franconi A., Badalucco L., Peck D., Nasr N.A multi-hierarchical "Design for X" framework for accelerating CE

- Urbinati, A., Chiaroni, D., & Chiesa, V. (2017). Towards a new taxonomy of circular economy business models. Journal of Cleaner Production, 168, 487–498.
- Vezzoli, C. A., & Manzini, E. (2008). Design for Environmental Sustainability (2008 edition). Berlin; London: Springer.
- Wastling, T., Charnley, F., & Moreno, M. (2018). Design for Circular Behaviour: Considering Users in a Circular Economy. Sustainability, 10(6), 1743.
- Weber, C., Husung, S., Cantamessa, M., Cascini, G., Marjanovic, D., Montagna, F., Design Society (A c. Di). (2015). Influence of design-for-X guidelines on the matching between the product architecture and supply network. Glasgow: Design Society.
- Webster, J., & Watson, R. T. (2002). Analyzing the past to prepare for the future: Writing a literature review. Mis Quarterly, 26(2), XIII–XXIII.
- Youssef, M. A. (1994). Design for Manufacturability and Time-to-Market, Part 1: Theoretical Foundations. International Journal of Operations & Production Management, 14(12), 6–21.
- Van Weelden, E., Mugge, R., & Bakker, C. (2016). Paving the way towards circular consumption: Exploring consumer acceptance of refurbished mobile phones in the Dutch market. Journal of Cleaner Production, 113, 743–754.